
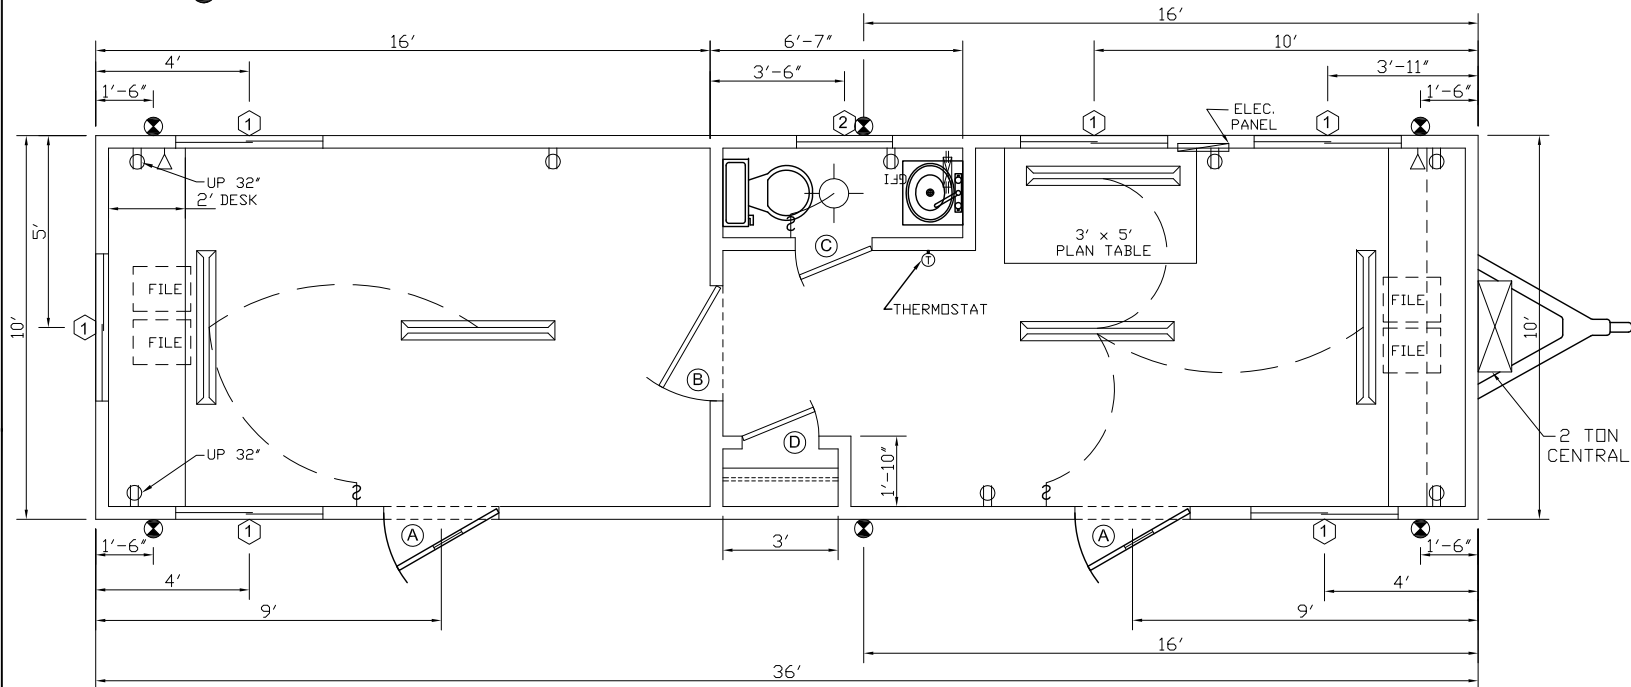


NOTES:

1: INSTALL 10 x10 LITE, ENTRY LOCKSET AND DEAD BOLT IN DOOR









2: =INDICATES TIE DOWN LOCATION (4 PLACES)




DOOR SCHEDULE			
MARK	SIZE	DISCRIPTION	HARDWARE
A	36 x 80	MD-300 SERIES	SEE NOTE #1
B	36 x 80	PREFIN. H. C.	PRIVACY
C	26 x 80	PREFIN. H. C.	PRIVACY
D	26 x 80	PREFIN. H. C.	PASSAGE

WINDOW SCHEDULE		
MARK	SIZE	DISCRIPTION
1	46 x 27	H/S (CLEAR) SINGLE STRENGTH W/ MINI-BLINDS
2	14 x 27	V/S (OBSCURE) SINGLE STRENGTH

SYMBOL LEGEND FOR ELECTRICAL

-  = 64-WATT FLUDRESCENT 2-TUBE, DIFFUSED LIGHT
-  = 110V DUPLEX RECEPTACLE
-  = 110V GFI DUPLEX RECEPTACLE
-  = 125 AMP BREAKER BOX
-  = INTERIOR LIGHTS SWITCHES
-  = PHONE "J" BOX
-  = GLOBE LIGHT
-  = 9.5 KW INLNE WATER HEATER

GENERAL SHELTERS OF TEXAS, INC.

 <p>Serving The Southwest "Exclusively Through Independent Dealers"</p>	TITLE: FLOOR PLAN	JOB NO. 011408B
	CUSTOMER:	PROJECT: 10' x 36' MOBILE OFFICE
SHEET	DATE: 1/17/08	SCALE: NONE

# 10' x 36' MOBILE OFFICE

## SPECIFICATIONS

BOX SIZE: 10' x 36'  
 TYPE: MOBILE BOWSTRING

### FRAME:

TYPE: OUTRIGGER  
 BEAM: 10"  
 HITCH: STANDARD  
 AXLES: 2  
 TIRES: (4) 8-PLY

### FLOOR:

BOTTOM BOARD: ROLL  
 INSULATION: R11 KRAFT FACED FIBERGLASS  
 JOISTS: 2x6 #3 SYP @ 16" O.C.  
 DECKING: 3/4" TONGUE & GROOVE PLYWOOD  
 COVERING: 1/8" TILE (COTTAGE TAN)  
 SKID: NONE

### EXTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (8'-0" WALL HT)  
 BOTTOM PLATE: 2x4 SINGLE BOTTOM PLATE  
 TOP PLATE: 2x4 DOUBLE TOP PLATE  
 COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)  
 SHEATING: NONE  
 INSULATION: R11 KRAFT FACED FIBERGLASS  
 SIDING: .019" PAINTED ALUMINUM (COL. WHITE)  
 TRIM: .019" PAINTED ALUMINUM (509 RED)

### INTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (8'-0" WALL HT.)  
 COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)  
 INSULATION: NONE  
 CLOSETS: 3'

### ROOF:

RAFTERS: BOW STRING TRUSS @ 24" O.C.  
 CEILING: 5/16" TEXTURED GYPSUM  
 INSULATION: R-11 KRAFT FACED FIBERGLASS  
 SHEATING: 3/8" O.S.B. SHINEY SIDE DOWN  
 ROOFING: .045 EPDM RUBBER  
 MANSARD: NONE  
 TIE DOWN: (3) PER SIDE

### DOORS:

EXTERIOR DOORS: (2) 36" x 80" M.D.-300 DOOR W/ ENTRY LOCKSET,  
 DEADBOLT & 10"x10" WINDOW,  
 INTERIOR DOORS: (1) 36" x 80" PREFIN. H.C. DOOR W/ PRIVACY LOCKSET  
 (1) 26" x 80" PREFIN. H.C. DOOR W/ PRIVACY LOCKSET  
 (1) 26" x 80" PREFIN. H.C. DOOR W/ PASSAGE LOCKSET

### WINDOWS:

WINDOW 1: (6) 46x27 H.S. CLEAR GLASS (SINGLE STRENGTH)  
 W/ MINI-BLINDS  
 WINDOW 2: (1) 14x27 V.S. OBSCURE GLASS (SINGLE STRENGTH)

### ELECTRICAL:

LOAD PANEL: (1) 125-AMP SINGLE-PHASE W/ 1-1/2" EMT THRU FLOOR  
 RACEWAY: CONCEALED ROMEX (#14 WIRE MINIMUM)  
 LIGHTS: (5) DIFUSSED 4' FLUORESCENT 2-BULBSTRIP,  
 (1) GLOBE LIGHT  
 RECEPTACLES: (7) 110-VOLT 15-AMP DUPLEX,  
 GFI RECEPTACLES: (1) 110-VOLT GFI 15-AMP DUPLEX  
 MISCELLANEOUS: (2) EMPTY J-BOX

### PLUMBING:

WATER CLOSETS: (1) TANK TYPE  
 MODESTY PARTITION: NONE  
 URINAL: NONE  
 LAVATORY: (1) 19"x17" VANITY CABINET  
 WATER HEATER: (1) 9.5 KW INLINE  
 SHOWER: NONE  
 DWV: PVC W/ (1) 1 1/2" SEWER VENT  
 ACCESSORIES: (1) MIRROR  
 MISCELLANEOUS: ALL DRAIN LINES CONNECTED

### HVAC:

A/C - HEATING: (1) 2 TON CENTRAL  
 DUCT: FIBERGLASS CEILING  
 DIFFUSERS: (5) 8'x10" 3-WAY  
 RETURNS: AT UNIT  
 EXHAUST FANS: NONE

### MISC:

DESK: (2) 24" x 120"  
 (1) PLAN TABLE  
 MISC.: (4) FILE CABINETS  
 (1) 12" SHELVES x 120"

## GENERAL SHELTERS OF TEXAS, INC.



TITLE:

SPECIFICATIONS

CUSTOMER:

PROJECT:

10' x 36' MOBILE OFFICE

JOB NO.

011408B

SHEET

SS

DATE: 1/17/08

SCALE: NONE