
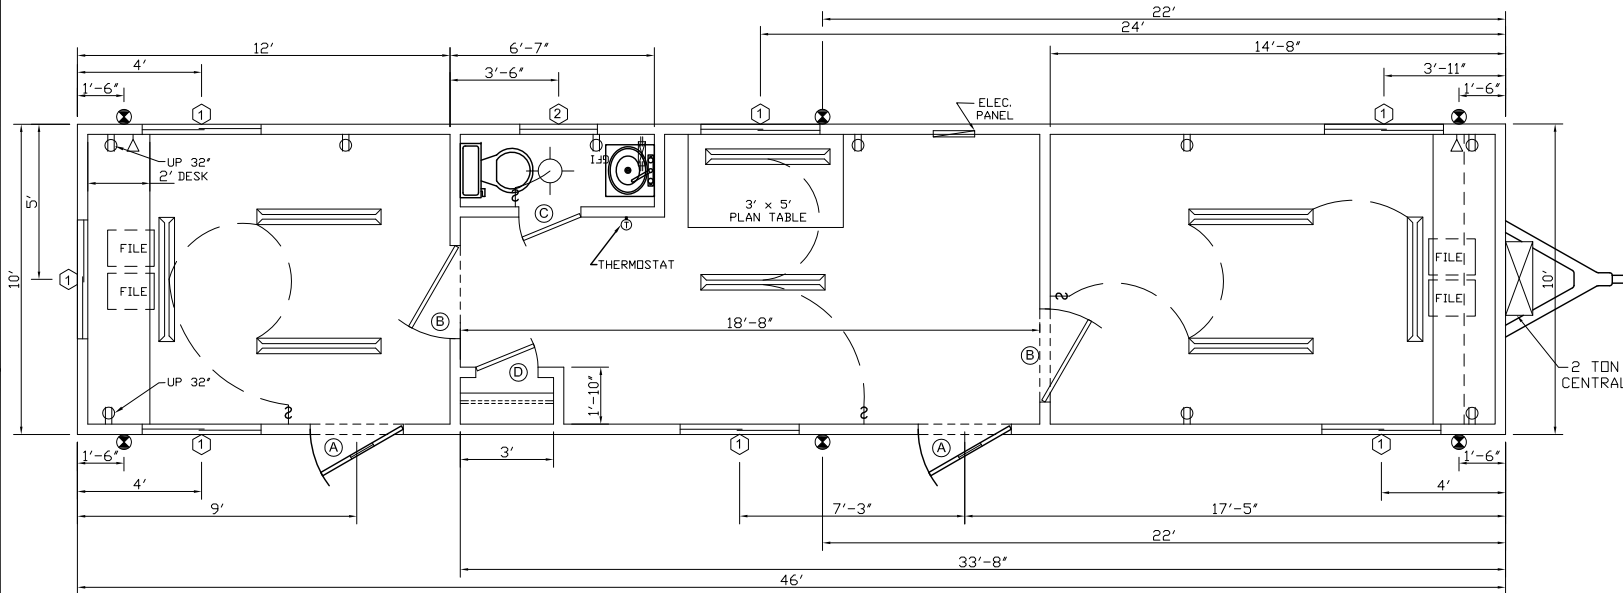


NOTES:









- 1: INSTALL 10 x10 LITE, ENTRY LOCKSET AND DEAD BOLT IN DOOR
- 2: =INDICATES TIE DOWN LOCATION (4 PLACES)



DOOR SCHEDULE			
MARK	SIZE	DISCRIPTION	HARDWARE
A	36 x 80	MD-300 SERIES	SEE NOTE #1
B	36 x 80	PREFIN. H. C.	PRIVACY
C	26 x 80	PREFIN. H. C.	PRIVACY
D	26 x 80	PREFIN. H. C.	PASSAGE

WINDOW SCHEDULE		
MARK	SIZE	DISCRIPTION
1	46 x 27	H/S (CLEAR) SINGLE STRENGTH W/ MINI-BLINDS
2	14 x 27	V/S (OBSCURE) SINGLE STRENGTH

SYMBOL LEGEND FOR ELECTRICAL

-  = 64-WATT FLUORESCENT 2-TUBE, DIFFUSED LIGHT
-  = 110V DUPLEX RECEPTACLE
-  = 110V GFI DUPLEX RECEPTACLE
-  = 125 AMP BREAKER BOX
-  = INTERIOR LIGHTS SWITCHES
-  = PHONE "J" BOX
-  = GLOBE LIGHT
-  = 9.5 KW INLNE WATER HEATER

GENERAL SHELTERS OF TEXAS, INC.

 <p style="font-size: small;">Serving The Southwest "Exclusively Through Independent Dealers"</p>	TITLE: FLOOR PLAN	JOB NO. 011408C
	CUSTOMER:	PROJECT: 10' x 46' MOBILE OFFICE
DATE: 1/17/08	SCALE: NONE	SHEET FP

10' x 46' MOBILE OFFICE

SPECIFICATIONS

BOX SIZE: 10' x 46'
 TYPE: MOBILE BOWSTRING

FRAME:

TYPE: OUTRIGGER
 BEAM: 10"
 HITCH: STANDARD
 AXLES: 2
 TIRES: (4) 8-PLY

FLOOR:

BOTTOM BOARD: ROLL
 INSULATION: R11 KRAFT FACED FIBERGLASS
 JOISTS: 2x6 #3 SYP @ 16" O.C.
 DECKING: 3/4" TONGUE & GROOVE PLYWOOD
 COVERING: 1/8" TILE (COTTAGE TAN)
 SKID: NONE

EXTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (8'-0" WALL HT)
 BOTTOM PLATE: 2x4 SINGLE BOTTOM PLATE
 TOP PLATE: 2x4 DOUBLE TOP PLATE
 COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)
 SHEATING: NONE
 INSULATION: R11 KRAFT FACED FIBERGLASS
 SIDING: .019" PAINTED ALUMINUM (COL. WHITE)
 TRIM: .019" PAINTED ALUMINUM (509 RED)

INTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (8'-0" WALL HT.)
 COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)
 INSULATION: NONE
 CLOSETS: 3'

ROOF:

RAFTERS: BOW STRING TRUSS @ 24" O.C.
 CEILING: 5/16" TEXTURED GYPSUM
 INSULATION: R-11 KRAFT FACED FIBERGLASS
 SHEATING: 3/8" O.S.B. SHINEY SIDE DOWN
 ROOFING: .045 EPDM RUBBER
 MANSARD: NONE
 TIE DOWN: (3) PER SIDE

DOORS:

EXTERIOR DOORS: (2) 36" x 80" M.D.-300 DOOR W/ ENTRY LOCKSET,
 DEADBOLT & 10"x10" WINDOW,
 INTERIOR DOORS: (2) 36" x 80" PREFIN. H.C. DOOR W/ PRIVACY LOCKSET
 (1) 26" x 80" PREFIN. H.C. DOOR W/ PRIVACY LOCKSET
 (1) 26" x 80" PREFIN. H.C. DOOR W/ PASSAGE LOCKSET

WINDOWS:

WINDOW 1: (7) 46x27 H.S. CLEAR GLASS (SINGLE STRENGTH)
 W/ MINI-BLINDS
 WINDOW 2: (1) 14x27 V.S. OBSCURE GLASS (SINGLE STRENGTH)

ELECTRICAL:

LOAD PANEL: (1) 125-AMP SINGLE-PHASE W/ 1-1/2" EMT THRU FLOOR
 RACEWAY: CONCEALED ROMEX (#14 WIRE MINIMUM)
 LIGHTS: (8) DIFUSED 4' FLUORESCENT 2-BULBSTRIP,
 (1) GLOBE LIGHT
 RECEPTACLES: (8) 110-VOLT 15-AMP DUPLEX,
 GFI RECEPTACLES: (1) 110-VOLT GFI 15-AMP DUPLEX
 MISCELLANEOUS: (2) EMPTY J-BOX

PLUMBING:

WATER CLOSETS: (1) TANK TYPE
 MODESTY PARTITION: NONE
 URINAL: NONE
 LAVATORY: (1) 19"x17" VANITY CABINET
 WATER HEATER: (1) 9.5 KW INLINE
 SHOWER: NONE
 DWV: PVC W/ (1) 1 1/2" SEWER VENT
 ACCESSORIES: (1) MIRROR
 MISCELLANEOUS: ALL DRAIN LINES CONNECTED

HVAC:

A/C - HEATING: (1) 2 TON CENTRAL
 DUCT: FIBERGLASS CEILING
 DIFFUSERS: (5) 8'x10" 3-WAY
 RETURNS: AT UNIT
 EXHAUST FANS: NONE

MISC:

DESK: (2) 24" x 120"
 (1) PLAN TABLE
 MISC.: (4) FILE CABINETS
 (1) 12" SHELVES x 120"

GENERAL SHELTERS OF TEXAS, INC.



TITLE: <p style="text-align: center;">SPECIFICATIONS</p>	
CUSTOMER:	
PROJECT: <p style="text-align: center;">10' x 46' MOBILE OFFICE</p>	JOB NO. <p style="text-align: center;">011408C</p>

SHEET

SS

DATE: 1/17/08

SCALE: NONE