

# GTD42EASJ

## GE Appliances Series 7.2 Cu. Ft. Capacity Electric Dryer

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

ELECTRIC DRYER RATING:			
240V	5600W	24A	60Hz
208V	4400W	22A	60Hz

**EXHAUST OPTION:** 4-way rear, right, left and bottom.

**CIRCUIT REQUIREMENTS:** An individual, properly-grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse, is required.

**NOTE:** Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

**INSTALLATION INFORMATION:** For complete information, see installation instructions packed with your dryer.

### SPECIAL INSTALLATION REQUIREMENTS

#### ALCOVE OR CLOSET INSTALLATION:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer **MUST** be exhausted to the outside.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" either side; 1" front, top and rear.
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.


#### BATHROOM OR BEDROOM INSTALLATION:

- The dryer **MUST** be exhausted to the outdoors.
- The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.


#### MINIMUM CLEARANCES OTHER THAN ALCOVE OR CLOSET INSTALLATION:

- Minimum clearances to combustible surfaces are: 0" both sides; 1" rear.

**DRYER EXHAUSTING INFORMATION:** Use metal duct only, vertical and horizontal ducting.

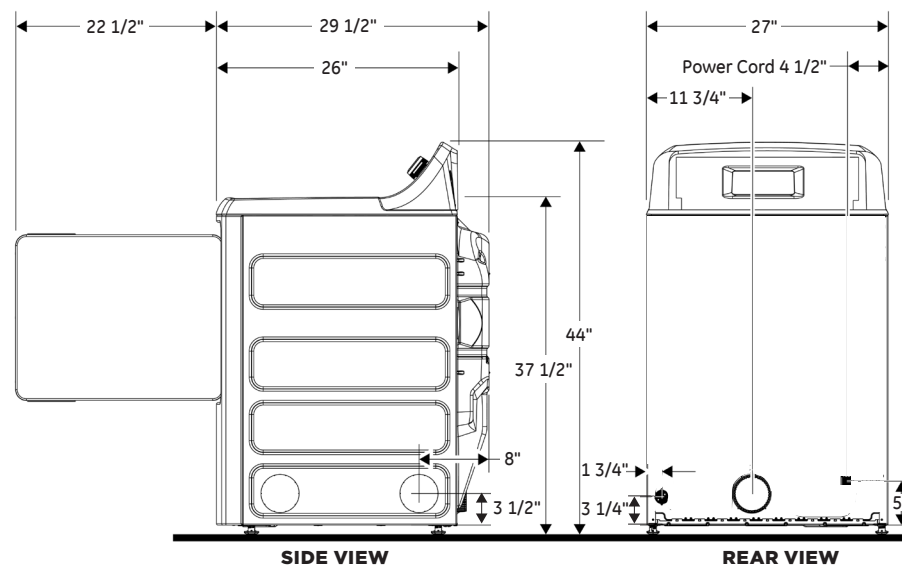

### POWER CORD LOCATIONS

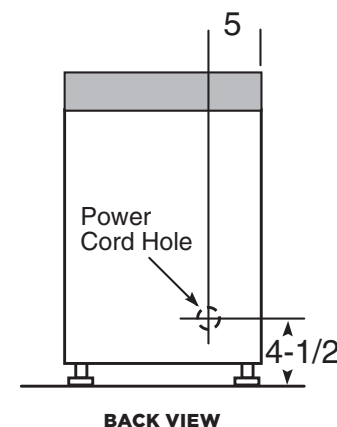

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 5/16

# GTD42EASJ

## GE Appliances Series 7.2 Cu. Ft. Capacity Electric Dryer

**FOR COMPLETE INFORMATION, SEE INSTALLATION INSTRUCTIONS PACKED WITH YOUR DRYER.**

### DUCTING MATERIALS:

For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used **ONLY** in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used **AND** where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

### EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table. A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow. A turn over 45° should be treated as a 90° elbow.


Dryers **must** be exhausted to the outside.

**CAUTION:** For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

**FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.**

### DRYER EXHAUSTING INFORMATION— USE METAL DUCT ONLY VERTICAL AND HORIZONTAL DUCTING

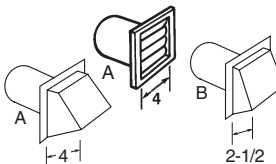BEST PERFORMANCE			
Maximum length of 4" dia rigid metal duct			
Exhaust hood type			
	Number of 90° turns	A 4" opening	B 2-1/2" opening
 Domestic dryer models	0	120 ft.	90 ft.
	1	100 ft.	75 ft.
	2	85 ft.	65 ft.
	3	70 ft.	55 ft.
	4	60 ft.	45 ft.
	5	55 ft.	35 ft.
Long Vent 6.1-7.4 cu. ft. capacity electric & gas (GTD33, GTD42, GTD45, GTD65, GTX22, GTX33, GTX42 and GTX65)			

For every extra 90° elbow, reduce the allowable vent system length by 10 ft.  
Two 45° elbows will be treated like one 90° elbow.  
For the side exhaust installations, add one 90° elbow to the chart.  
When calculating the total vent system length, you must add all the straight portions and elbows of the system (including the transition duct).



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 5/16

# GTD42EASJ

## *GE Appliances Series 7.2 Cu. Ft. Capacity Electric Dryer*

### **FEATURES AND BENEFITS**

**Auto Dry** – For clothes that come out feeling and looking great, this setting monitors air temperature to set the optimal drying time


**WrinkleCare Extended Tumble** – Reduces wrinkling and creasing

**End-of-Cycle Signal** – Alerts you when the load is done, so clothes can be removed before wrinkles set in

**4 heat selections** – Provide the right temperatures for your clothes-drying needs

**Up to 120-ft. venting capability** – Provides flexible installation

**Model GTD42EASJWW** – White

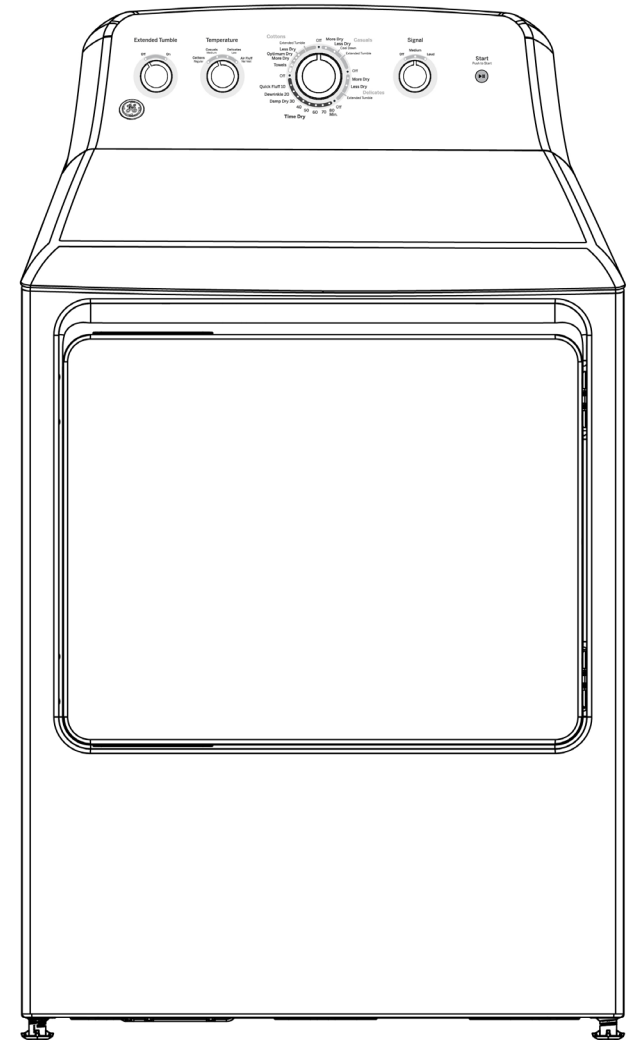

# GE® 7.2 cu. ft. Capacity aluminized alloy drum Electric Dryer



Model# GTD42EASJWW



- Auto Dry - For clothes that come out feeling and looking great, this setting monitors air temperature to set the optimal drying time
- Up to 120 ft. venting capability - Provides flexible installation
- Aluminized alloy drum - Improves energy efficiency and resists corrosion
- Wrinkle Care extended tumble - Reduces wrinkling and creasing
- End-of-cycle signal - Alerts you when the load is done, so clothes can be removed before wrinkles set in
- 4 heat selections - Provide the right temperatures for your clothes-drying needs

### FEATURES

Heat Selections	4
Number of Cycles	4
Long Vent Capability	Up to 120 feet
Temperature Options	Regular/Medium/Low/Air Fluff (No Heat)
Control Type	Electromechanical
Style	Top-Loading
Casuals Cycle	Cool Down; Less Dry; More Dry
Delicates Cycle	Less Dry; More Dry; Optional Wrinkle Care
Timed Dry	80 Minutes; Quick Fluff (no heat)
Wrinkle Care Cycle	Yes
Cottons Cycle	Less Dry; More Dry; Optimum Dry; Towels
Air Fluff (no heat)	Yes
Easy Care Cycle	Casuals; Cool Down; Less Dry; More Dry
Removable Up-Front Lint Filter	Yes
Drum Type	Aluminized Alloy
Exhaust Options	4-Way (Rear; Right; Left & Bottom)
Fuel Type	Electric
Reverse-a-Door	Yes
Additional Dryer Features	Extended Tumble; Front Serviceable; Interior Light; Removable Up-Front Lint Filter
Dryer Control Features	Adjustable End-of-Cycle Signal

Have more questions? Please contact 1-800-626-2005

# GE® 7.2 cu. ft. Capacity aluminized alloy drum Electric Dryer



Model# GTD42EASJWW

## **APPROXIMATE DIMENSIONS (HxDxW)**

- 44 in x 29 1/2 in x 27 in

## **CAPACITY**

- Total Capacity (cubic feet) 7.20 cu ft

## **WARRANTY**

- Labor Warranty - Limited 1-year entire appliance
- Parts Warranty - Limited 1-year entire appliance
- Warranty Notes - See written warranty for full details

Have more questions? Please contact 1-800-626-2005

# GTW460ASJ

## GE® Series 4.2 DOE Cu. Ft. Capacity Stainless Steel Basket Washer

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

**CIRCUIT REQUIREMENTS:** An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.

**ELECTRICAL RATING:**


120V, 60Hz

**WASHER NOTE:**

Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

**INSTALLATION INFORMATION:**

Before installing, consult installation instructions packed with your washer.

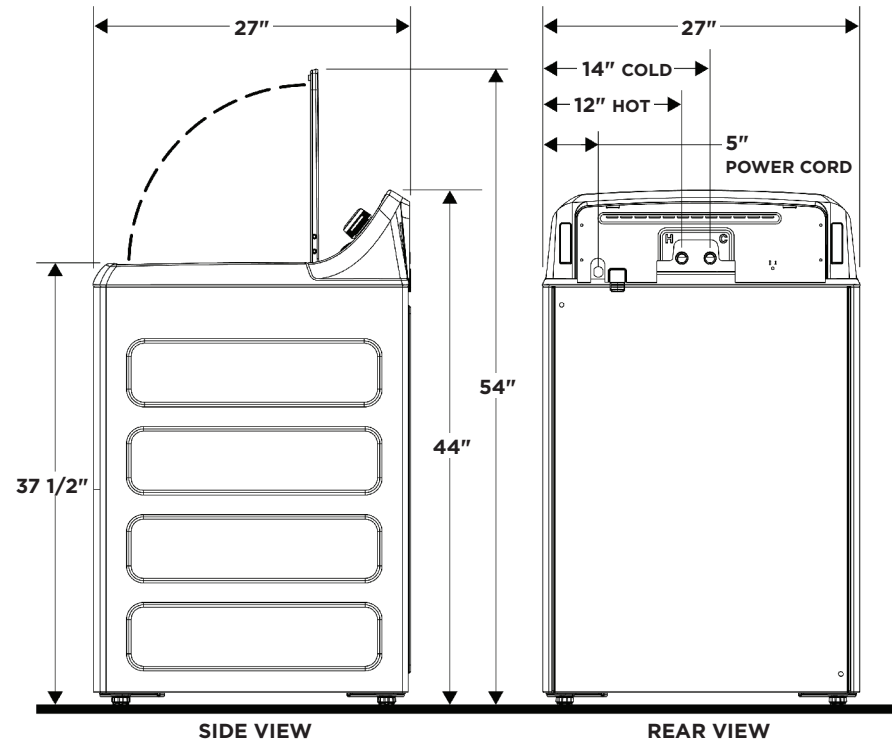

GE APPLIANCES

For answers to your Monogram, GE Profile™ Series or GE® Series appliance questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center service, 800.626.2000.



Listed by  
Underwriters  
Laboratories


Specification Revised 12/15

# GTW460ASJ

## GE® Series 4.2 DOE Cu. Ft. Capacity Stainless Steel Basket Washer

### FEATURES AND BENEFITS

- Deep Fill – Customize your water-fill levels with just the touch of a button. Add a little extra or fill the tub to wash the way you want.
  - Dual-Action Agitator – Provides gentle, dual-wash action.
  - Deep Rinse – Removes any leftover soap residue.
  - Auto Soak – Loosens stains by soaking up to 2 hours.
  - Speed Wash – Delivers ready-to-go results within minutes.
  - Load Size – Automatically measures load size, and adjusts settings and water levels accordingly. Settings are customizable, so you always get the wash you want.
- Model GTW460ASJWW – White

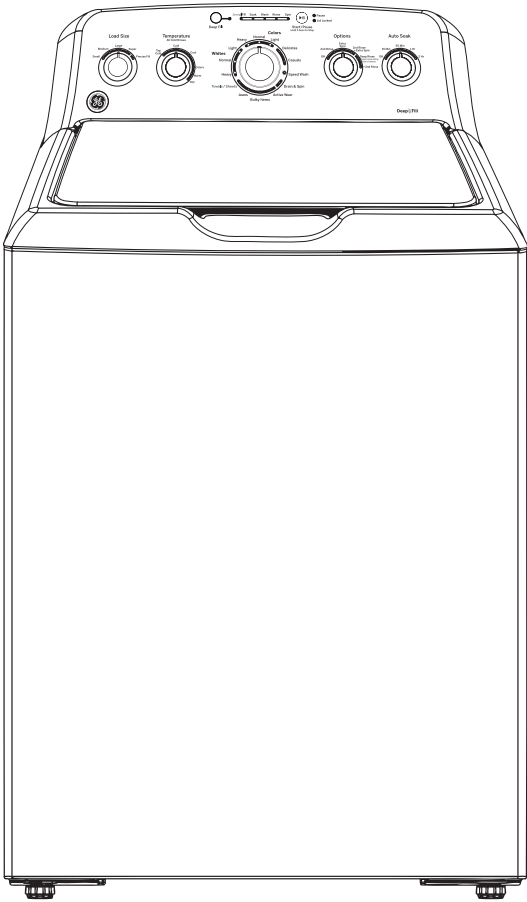

MODIFIED ENERGY FACTOR (IMEF)	1.35
WATER FACTOR (IWF)	7.0

