


**NOTES:**

- 1: INSTALL 10 x10 LITE, ENTRY LOCKSET AND DEAD BOLT IN DOOR
- 2: ⊗=INDICATES TIE DOWN LOCATION (4 PLACES)

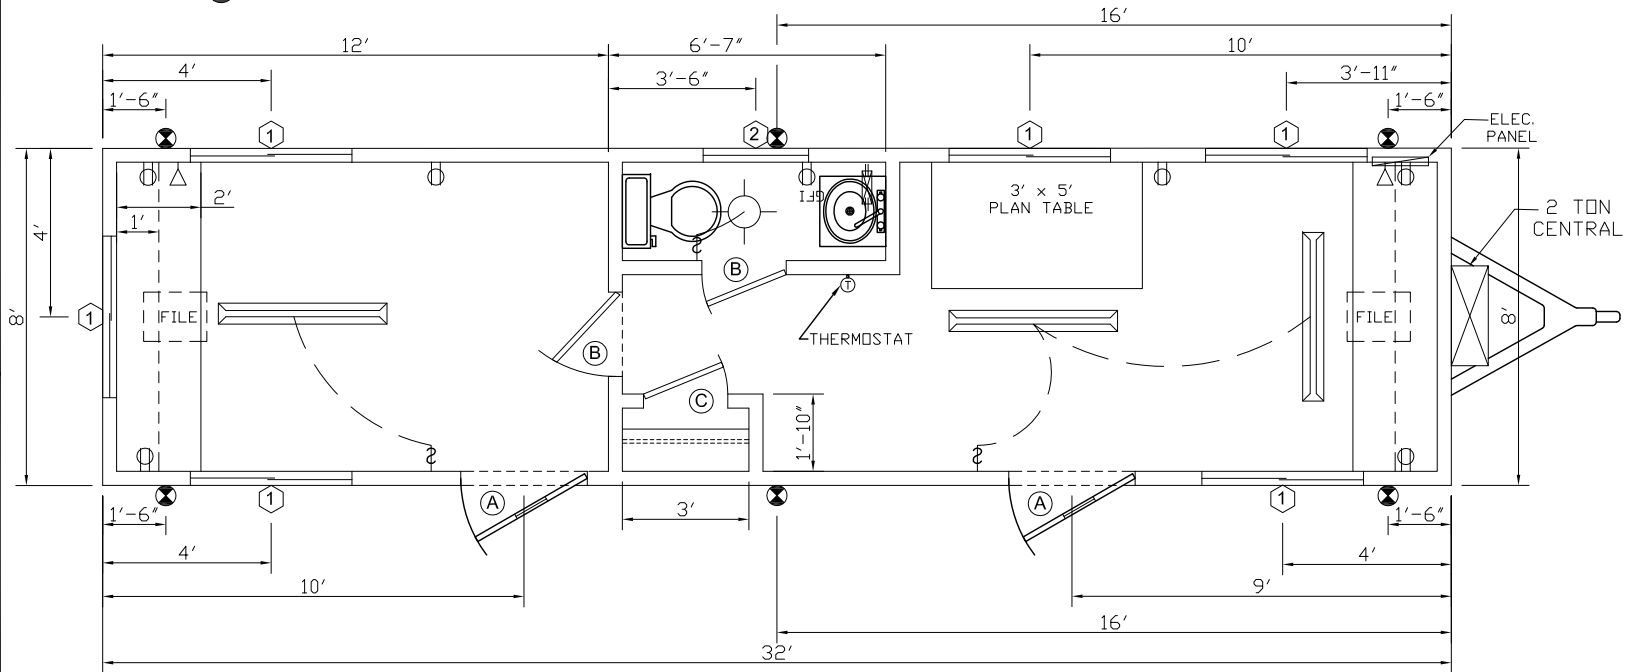

| DOOR SCHEDULE |         |               |             |
|---------------|---------|---------------|-------------|
| MARK          | SIZE    | DISCRIPTION   | HARDWARE    |
| A             | 36 x 80 | MD-300 SERIES | SEE NOTE #1 |
| B             | 26 x 80 | PREFIN. H. C. | PRIVACY     |
| C             | 26 x 80 | PREFIN. H. C. | PASSAGE     |

| WINDOW SCHEDULE |         |  |
|-----------------|---------|--|
| MARK            | SIZE    | DISCRIPTION                                |
| 1               | 46 x 27 | H/S (CLEAR) SINGLE STRENGTH W/ MINI-BLINDS |
| 2               | 14 x 27 | V/S (OBSCURE) SINGLE STRENGTH              |

**SYMBOL LEGEND FOR ELECTRICAL**

- = 64-WATT FLUORESCENT 2-TUBE, DIFFUSED LIGHT
- = 110V DUPLEX RECEPTACLE
- = 110V GFI DUPLEX RECEPTACLE
- = 125 AMP BREAKER BOX
- = INTERIOR LIGHTS SWITCHES
- = PHONE "J" BOX
- = GLOBE LIGHT
- = 9.5 KW INLNE WATER HEATER

**GENERAL SHELTERS OF TEXAS, INC.**

|  |                   |                                   |
|--|-------------------|-----------------------------------|
|  | TITLE: FLOOR PLAN | JOB NO. 011408A                   |
|  | CUSTOMER:         | PROJECT: 8' x 32' MOBILE BUILDING |
| Serving The Southwest<br>"Exclusively Through Independent Dealers" | DATE: 1/17/08     | SCALE: NONE                       |
| SHEET  | FP                |                                   |

# 8' x 32' MOBILE BUILDING

## SPECIFICATIONS

BOX SIZE: 8' x 32'  
 TYPE: MOBILE BOWSTRING

### FRAME:

TYPE: OUTRIGGER  
 BEAM: 8"  
 HITCH: STANDARD  
 AXLES: 2  
 TIRES: (4) 8-PLY

### FLOOR:

BOTTOM BOARD: ROLL  
 INSULATION: R11 KRAFT FACED FIBERGLASS  
 JOISTS: 2x6 #3 SYP @ 16" O.C.  
 DECKING: 3/4" TONGUE & GROOVE PLYWOOD  
 COVERING: 1/8" TILE (COTTAGE TAN)  
 SKID: NONE

### EXTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (7'-0" WALL HT)  
 BOTTOM PLATE: 2x4 SINGLE BOTTOM PLATE  
 TOP PLATE: 2x4 DOUBLE TOP PLATE  
 COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)  
 SHEATING: NONE  
 INSULATION: R11 KRAFT FACED FIBERGLASS  
 SIDING: .019" PAINTED ALUMINUM (COL. WHITE)  
 TRIM: .019" PAINTED ALUMINUM (509 RED)

### INTERIOR WALLS:

STUDS: 2x4 STUD GRADE (SYP) @ 16" O.C. (7'-0" WALL HT.)  
 COVERING: 1/4" PANELING (HAMPTON GRAY VINYL)  
 INSULATION: NONE  
 CLOSETS: 3'

### ROOF:

RAFTERS: TAPERED 2 x 8 (24" O.C.)  
 CEILING: 5/16" TEXTURED GYPSUM  
 INSULATION: R-11 KRAFT FACED FIBERGLASS  
 SHEATING: 3/8" O.S.B. SHINEY SIDE DOWN  
 ROOFING: .045 EPDM RUBBER  
 MANSARD: NONE  
 TIE DOWN: (3) PER SIDE

### DOORS:

EXTERIOR DOORS: (2) 36" x 80" M.D.-300 DOOR W/ ENTRY LOCKSET, DEADBOLT & 10"x10" WINDOW,  
 INTERIOR DOORS: (2) 26" x 80" PREFIN. H.C. DOOR W/ PRIVACY LOCKSET  
 (1) 26" x 80" PREFIN. H.C. DOOR W/ PASSAGE LOCKSET

### WINDOWS:

WINDOW 1: (6) 46x27 H.S. CLEAR GLASS (SINGLE STRENGTH) W/ MINI-BLINDS  
 WINDOW 2: (1) 14x27 V.S. OBSCURE GLASS (SINGLE STRENGTH)

### ELECTRICAL:

LOAD PANEL: (1) 125-AMP SINGLE-PHASE W/ 1-1/2" EMT THRU FLOOR  
 RACEWAY: CONCEALED ROMEX (#14 WIRE MINIMUM)  
 LIGHTS: (3) DIFUSSED 4' FLUORESCENT 2-BULBSTRIP,  
 (1) GLOBE  
 RECEPTACLES: (6) 110-VOLT 15-AMP DUPLEX,  
 GFI RECEPTACLES: (1) 110-VOLT GFI 15-AMP DUPLEX  
 MISCELLANEOUS: (2) EMPTY J-BOX  
 RUNNING LIGHTS

### PLUMBING:

WATER CLOSETS: (1) TANK TYPE  
 MODESTY PARTITION: NONE  
 URINAL: NONE  
 LAVATORY: (1) 19"x17" VANITY CABINET  
 WATER HEATER: (1) 9.5 KW INLINE  
 SHOWER: NONE  
 DWV: PVC W/ (1) 1 1/2" SEWER VENT  
 ACCESSORIES: (1) MIRROR  
 MISCELLANEOUS: ALL DRAIN LINES CONNECTED

### HVAC:

A/C - HEATING: (1) 2 TON CENTRAL  
 DUCT: FIBERGLASS CEILING  
 DIFFUSERS: (5) 8'x10" 3-WAY  
 RETURNS: AT UNIT  
 EXHAUST FANS: NONE

### MISC:

DESK: (2) 24" x 96"  
 (1) PLAN TABLE  
 MISC.: (2) FILE CABINETS  
 (2) 12" SHELVES x 96"

## GENERAL SHELTERS OF TEXAS, INC.



|                                      |                    |
|--------------------------------------|--------------------|
| TITLE:<br>SPECIFICATIONS             |                    |
| CUSTOMER:                            |                    |
| PROJECT:<br>8' x 32' MOBILE BUILDING | JOB NO.<br>011408A |

SHEET **SS**

DATE: 1/17/08

SCALE: NONE